


PALLET DOLLIES

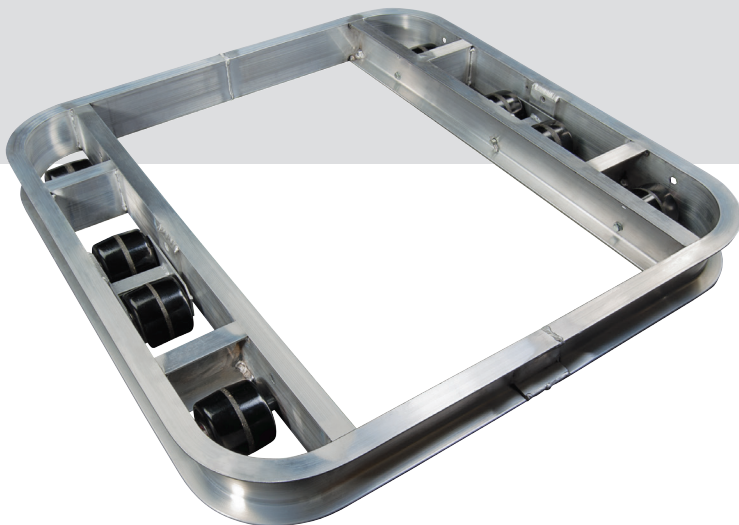


DON'T WAIT FOR A FORKLIFT!

- Easy access to any pallet load, increases safety and productivity
- Lightweight, heavy-duty aluminum channel frame construction
- Rounded corners for safety
- Steel hexagonal axles interlock with frame to prevent rotation
- Compatible with all pallet systems: wood - metal - plastic - slip sheet
- Available in non-tilt and tilt design to enable turning

SPECIFICATIONS		
Available widths	36", 42" or 48"	
Available lengths	36", 42" or 48"	
Height from floor	4-½"	
Weight (range)	30 – 47 lbs.	
Capacity for PDN (non-tilt models)		
	PHENOLIC	TPU
6 roller, 2 center rollers	4,000 lbs.	3,000 lbs.
8 roller, 4 center rollers	6,000 lbs.	4,000 lbs.
10 roller, 6 center rollers	8,000 lbs.	5,000 lbs.
Capacity for PDT (tilt models)		
	PHENOLIC	TPU
6 roller, 2 center rollers	3,600 lbs.	2,000 lbs.
8 roller, 4 center rollers	5,400 lbs.	3,000 lbs.
10 roller, 6 center rollers	7,200 lbs.	4,000 lbs.

Options

HORIZONTAL CENTER BRACE

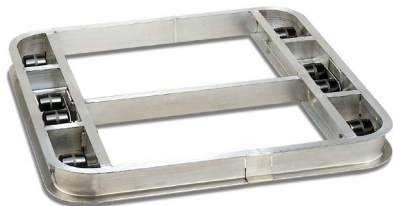

Adds additional load support (center brace not compatible with Towing Hitch option).

ROLLERS



P/N	D"	W"	WT.(LBS.)
140101	3.5	3	1.35

Phenolic non-marking roller with semi-precision bearings (standard).

P/N	D"	W"	WT.(LBS.)
140104	3.5	3	1.45

Thermoplastic polyurethane non-marking roller with semi-precision bearings (required for towing option).

FLOOR LOCK KIT



P/N	D"	W"	H"	WT.(LBS.)
33491	7.5	8	4.5	7.0

Kit includes one floor lock, mounting plate, and hardware to install on non-roller end of pallet dolly. Two kits can be installed per pallet dolly (one on each opposing side).

PALLET DOLLIES

Towing Hitch

Allows multiple pallet dollies to be towed at a time. 5 mph maximum towing speed.

- Improve material flow and cycle efficiency
- Reduce inventory and material handling
- TPU rollers required



Welded roller cover is required for use with any pallet style with legs (including: sheet molded plastic and corrugated formed pallets)

TOWING QUANTITY (UP TO)	WT. CAP.
Five (6 roller) dollies	10,000 lbs.
Four (8 roller) dollies	12,000 lbs.
Three (10 roller) dollies	12,000 lbs.

TOWING KITS		
P/N	Description	WT.(lbs.)
35020	36" long dollies	14.0
35021	42" long dollies	14.5
35022	48" long dollies	15.0

Towing kits include hitch system, center cross brace and hardware.

Towing Hitch Options

HANDLE



HANDLE		
P/N	DESCRIPTION	WT.(LBS.)
35023	Includes a handle, hitch bracket and hardware	14.5

MAGLINER®

magliner.com

📍 Magline, Inc.
 1205 West Cedar Street | Standish, MI 48658
 📞 1.800.MAGLINE (624.5463)
 (989) 512.1000 (Outside U.S. & Canada)
 📠 Fax: (989) 803.5941